



# LODESTAR®

## ELECTRIC CHAIN HOIST

### 2-TON SINGLE-REEVED

The CM® Lodestar® is now available as an economical 2-ton, single-reeved unit that's ideal for a variety of industrial lifting applications. And, because it's a single reeved unit, the design prevents the lower hook block from capsizing and damaging the hoist.

#### BENEFITS & FEATURES

##### LESS MAINTENANCE & EASIER INSPECTION

- Brake location allows for quick access and easy inspection.
- Lifetime grease-lubricated Gear Box means no oil change is required.
- Clutch located outside the Gear Box allows for easy access which eliminates the need for complete disassembly and reduces downtime.

##### IMPROVED SERVICEABILITY

Easy access to the Clutch, Motor, Electrical Control Panel and Brake Assembly.

##### LONGER SERVICE LIFE

- Heavy-duty DC brake is designed for a long service life.
- Lifetime grease-lubricated Gear Box and helical gearing ensures better wear and smooth operation. Heavy-duty rated motors.

##### IMPROVED LOAD SAFETY

Clutch is located outside the load path preventing slipping of the load in an overload condition when the brake is not powered.

##### IMPROVED CHAIN LIFE

5-Pocket Lift Wheel provides better chain and lift wheel engagement for smoother lifting and reduced vibration equating to less wear and a longer chain life. Zinc plating protects chain from environmental conditions.

##### EASY ACCESS CONTROL PANEL

Finger-safe wiring and plug-and-play connectors on the Control Panel allow for quick voltage change, easy access to terminal strips and simple fuse installation.

##### ZINC PLATED LOAD CHAIN

Designed and manufactured by Columbus McKinnon. 10 millimeter, zinc-plated Grade 80 load chain protects against corrosion.

##### ADJUSTABLE LIMIT SWITCH

Easy-to-adjust screw limit switch automatically stops the hook at any predetermined point when either lifting or lowering, preventing overtravel.

##### OVERLOAD PROTECTOR

Helps prevent lifting of dangerous overloads.

##### METRIC RATED

##### LIFETIME WARRANTY

The industry's best warranty against manufacturing and material defects.


##### FABRIC CHAIN CONTAINER

Standard up to 20 ft lift.

##### RIGID HOOK SUSPENSION



# **LODESTAR<sup>®</sup>** ELECTRIC CHAIN HOIST

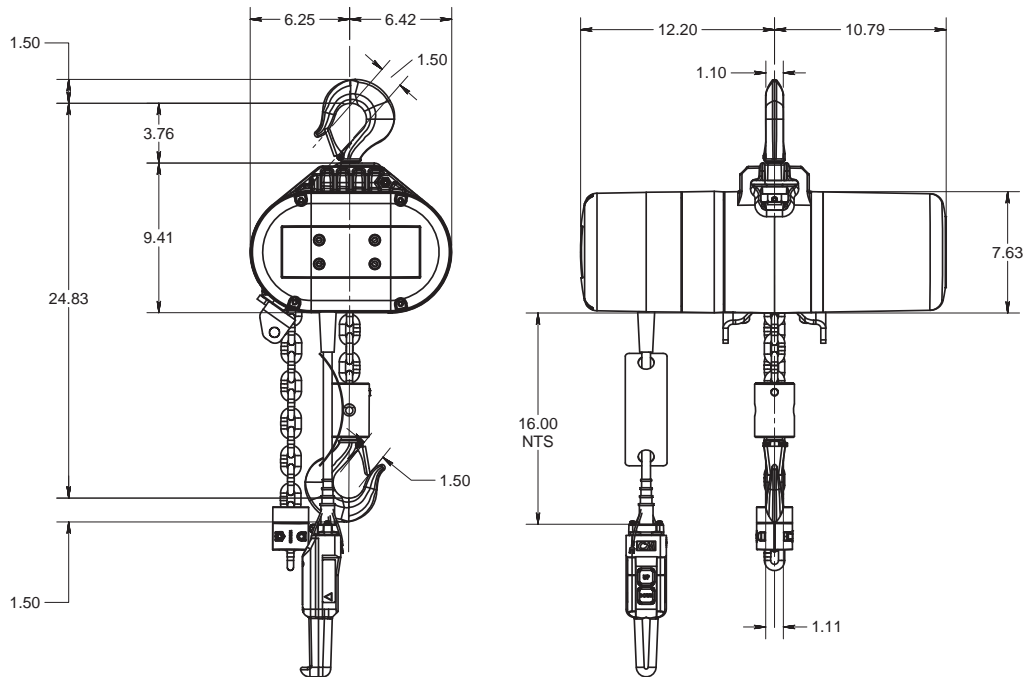

Dimensions (in inches) are RRS model CM Lodestar 2 Ton Single Reeved with Swivel Latch Type Hook Suspension.

## OPTIONAL FEATURES

### DOUBLE DC BRAKE

Two independent acting DC Brakes for redundant braking. Field installation kit available.

### VARIABLE SPEED DRIVE (VFD)

### PRIMARY & SECONDARY TRANSFORMER FUSING

### ROTATABLE LIMIT SWITCH

Designed for quick reset of limit position.

### METAL CHAIN CONTAINERS



**USA:** 800.888.0985 • 716.689.5400 • Fax: 716.689.5644  
**CDN:** 877.264.6478 • Fax: 877.264.6477  
[www.cmworks.com](http://www.cmworks.com)